




NSA2-240

Type 2 Surge Protection Kit - Compact Pluggable c/w neutral & earth links

Technical Specifications		
Change to Suitable for Earthing Type	TN-C, TN-C-S, IT & TT	
Type	Type 2	
Rated Working voltage of Uo	230V	
Max. discharge current 8/20µs (kA)	(Imax)	40kA
Nominal Discharge current 8/20µs (kA)	20kA	
Max. Continuous operating voltage	(Uc)	275 V~
Voltage protection level (kV)	(Up)	335 Vac withstand
Supplied with cables	Yes	
IP Rating	IP20	
Material	PA66	
Local indicator	Green indicates normal state and red indicates failure	
Flammability Rating	Comply with UL94V-0	
Remote Signaller	Yes	
Busbar Mounting	Yes	
Relevant Standards	BS EN 61643-11	

Wiring Diagram

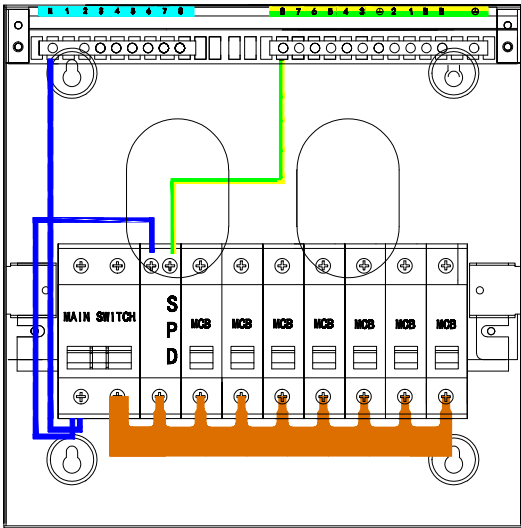

Technical Drawing

