NATIONAL VENTILATION

Manufacturers & suppliers of monsoon products

Monsoon Zone 1 Silence Range

electrical wholesaler ew awards 2019 HIGHLY COMMENDED

- Improved performance - can be installed with longer duct runs
- Easier to install - easier wiring and handy spirit level
- Quieter than ever - as low as 22dB(A)
- Comes with our highest ever warranty - 5 years

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk

CODE	DESCRIPTION
MONS100SA	100mm Standard Model 97m³/h
MONS100TA	100mm Timer Model adjustable from 2-30 minutes 97m³/h
MONS100HTA	100mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 97m³/h
MONS100PCA	100mm Pull Cord Model 97m³/h
MONS100PIRA*	100mm Passive Infrared Model c/w Timer 97m³/h
MONDMEVWK	100mm Window Kit 97m³/h
MONSCHR	100mm Chrome Facia (not compatible with MONS100PIR)
MONS125SA	125mm Standard Model 185m³/h
MONS125TA	125mm Timer Model adjustable from 2-30 minutes 185m³/h
MONS125HTA	125mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 185m³/h
MONS150SA	150mm Standard Model 370m³/h
MONS150TA	150mm Timer Model adjustable from 2-30 minutes 370m³/h
MONS150HTA	150mm Timer/Humidistat/Pullcord Model adjustable from 60-90% 370m³/h

* PIR model meets IPX4 standard

The Monsoon Silence range is the latest innovative domestic ventilation solution, providing high extraction rates with low energy use and exceptionally quiet running levels. The fan comes with a long life ball bearing motor and a silent back draft shutter preventing air travelling back up the duct and into the room. The casing and impeller are made of durable high quality plastic, which helps to prevent degradation and discolouration of the plastic over time. The MONS - 100, 100T, 100HT and 100PC are also now available in a chrome finish, making this stylish fan match well with any modern interior.

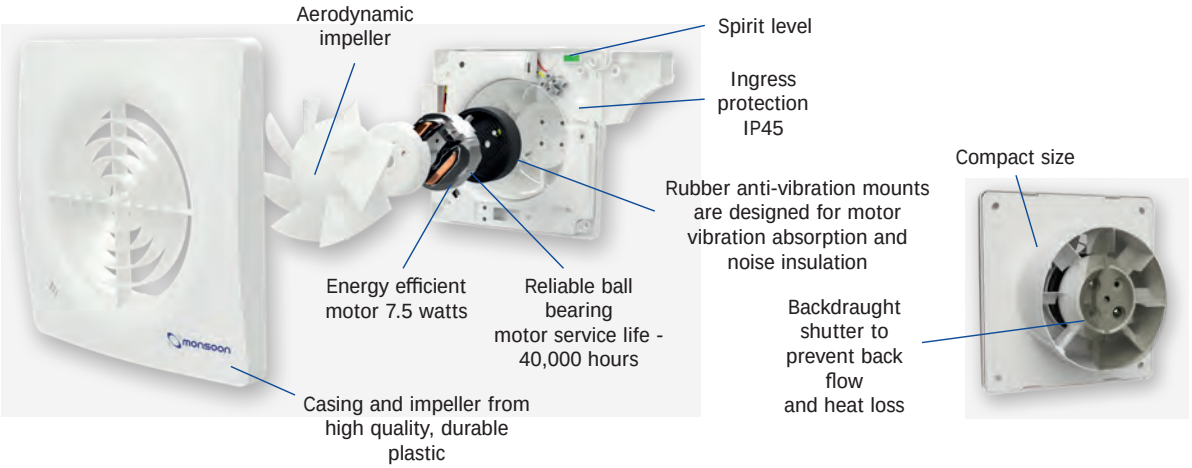

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk

Technical data

	MON-S100		MON-S125		MON-S150	
Speed	High	Low	High	Low	High	Low
Volts at 50 Hz (V)	230	230	230	230	230	230
Power (W)	7.5	5	14	10.5	19	9
Specific Fan Power (W/l/s)	0.33	0.25	0.29	0.27	0.21	0.24
Current (A)	0.051	0.049	0.083	0.067	0.094	0.07
Performance (l/s)	27	20	48	38	89	37
Sound @ 3m dB(A)	25	22	38	29	41	32
Weight (Kg)	0.55	0.55	0.99	0.99	1.80	1.80
IP rating*	IP45	IP45	IP45	IP45	IP45	IP45

* PIR model meets IPX4 standard

Performance Comparison

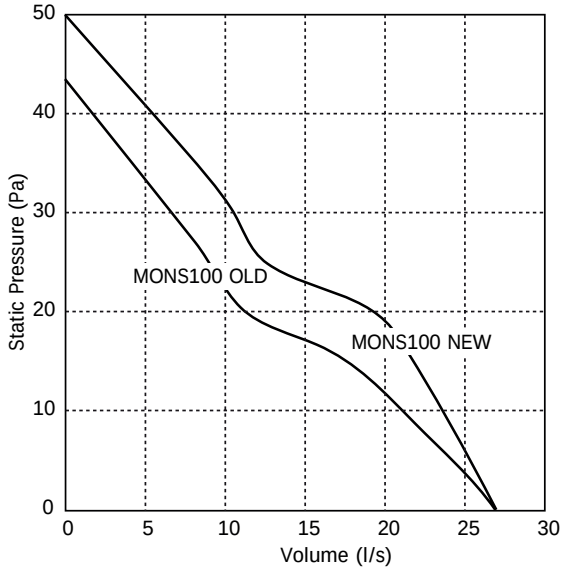

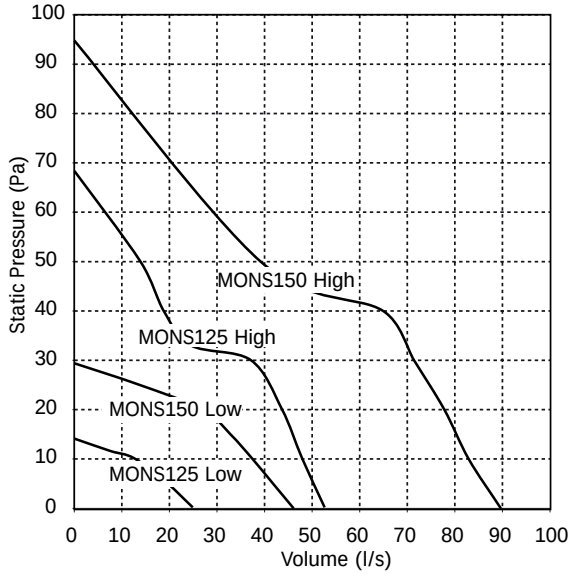

Dimensions

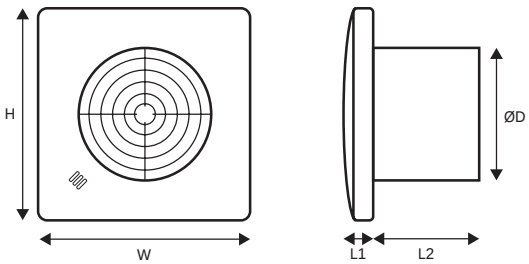

MODEL	H	W	L1	L2	ØD
MONS100	160	160	22	80	99
MONS125	185	185	29	100	120
MONS150	227	227	30.5	111	146

Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk