

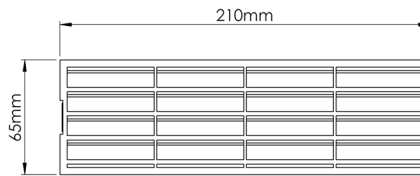


# PRODUCT DATA SHEET

## VKC704

Airbrick Grille

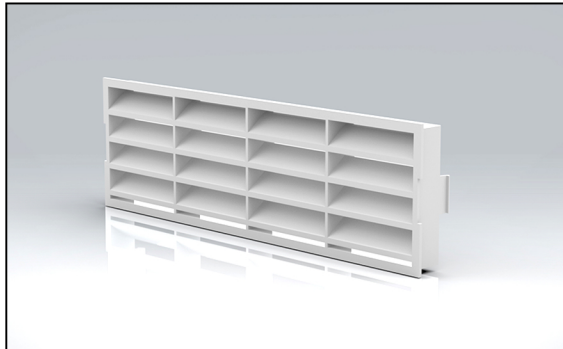

|           |         |
|-----------|---------|
| <b>W</b>  | RAL9003 |
| <b>B</b>  | RAL8017 |
| <b>BE</b> | RAL1001 |
| <b>T</b>  | RAL2001 |
| <b>BL</b> |         |

**MANUFACTURER:** VERPLAS LTD

**PART NUMBER:** VKC704

**SIZE:** External Grille

**FOR USE WITH:** VERPLAS AIRBRICKS

**BOX QUANTITY:** 60

**INDIVIDUAL WEIGHT:** 40g

**COLOUR:** Colour

**MIN OPERATING TEMP:** -15°C

**MAX OPERATING TEMP:** +60°C

### SPECIFICATION DETAILS

The VKC704 Airbrick Grille is manufactured from Polypropylene and is available in multiple colours and has a minimum free area of 7,680mm<sup>2</sup>.

VKC704 is manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.


VKC704 has been designed for use with multiple Verplas System sizes within our Rectngular Ducting Range.

### AIRFLOW RESISTANCE

|        |          |
|--------|----------|
| 8 l/s  | 2.00 Pa  |
| 13 l/s | 5.50 Pa  |
| 21 l/s | 11.00 Pa |
| 30 l/s | 18.40 Pa |
| 60 l/s | 71.90 Pa |

### PERFORMANCE CURVE

Pressure Loss Pascals (Pa)

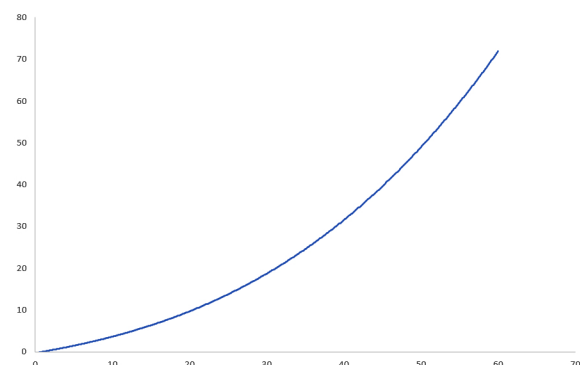


VKC5733



220x90mm Double Airbrick Adaptor


### Associated Ancillaries

VKC5608G



204x60mm Airbrick

VKC703



234x29mm Airbrick Adaptor

Air Flow rate (l/s)

View the Full Range



Sales@Verplas.co.uk



www.Verplas.co.uk



+44 (0) 1202 825898

Scan Me

